



ISO 9001  
Registered

Quality  
Management

# SAFTCART<sup>t.m.</sup>

Product Catalog



## Innovation

The guiding principle of Saf-T-Cart is to provide you with the absolute best in cylinder transportation and storage systems through continual research and development and the highest customer satisfaction.

## Performance

Our equipment transports cylinders in high volume, using less man-hours and more efficiency. From the pallet trailer down to a single cylinder hand tote and storage cart, we help you get the job done.

## The Crossroads

Saf-T-Cart is located in Clarksdale, Mississippi, at the classic location of the two great Blues highways, Hwy. 61 and Hwy. 49. This crossroad is conveniently located next door to the FedEx distribution center in America's distribution capital, Memphis, TN., ensuring the timely delivery of your goods.

## Service

Here at Saf-T-Cart, we promise to help raise you, our customer, to the highest position in your field by offering a superior product at a competitive price. Together we can solve any problem with real and personal interaction.

## Quality

Our products are stress tested for their quality and performance capabilities and often exceed OSHA standards and requirements. Then they are inspected and marked by quality assurance inspectors.

## The Saf-T-Cart Guarantee

If, for any reason, you are not completely satisfied with our product, simply return it, freight collect, for a full refund or credit.

No questions asked.

Contact us at

[www.saftcart.com](http://www.saftcart.com)

or

[sales@saftcart.com](mailto:sales@saftcart.com)

800-542-2278

fax to: 662-627-1640



**Sustaining Member**

## Table of Contents

<b>Oxy/Acetylene Carts</b>	
Small Carts	1
Firewall Information	3
Medium Carts	4
Large Carts	5
Industrial Carts	6
Cylinder Key	11
<b>Delivery</b>	
Cylinder Carts	12
Hard Good Carts	15
<b>Medical Carts</b>	
E/D Carts	16
M6 Carts	20
Large & Specialty Medical Carts	22
Saf-Top	23
Saf-T-Coating	26
<b>Running Gear</b>	
Mig, Invert, and Welder	28
<b>Storage Products</b>	
Cylinder Stands and Wall Brackets	30
Cylinder Cages	33
Propane Cages	36
<b>Gas Distribution</b>	
Pallets & Pallet Racks	38
Cradle Information	42
Manifolds	43
Pallet Headers and Cradles	44
<b>Pallet Trailers</b>	
Customized Trailer Information	48
<b>Straps, Caps, and Wheels</b>	
Cylinder Caps	54
Straps	55
Wheels	56
Casters	59
Origins of Saf-T-Cart	61

## Terms

Payment terms are a net 30 days with credit and distributor approval.

Credit card payments accepted from approved distributors and may incur a fee.

## Return Policy

If, for any reason, you are not completely satisfied with our product, simply return it, freight collect, for a full refund or credit.

Please, ask for a return authorization for tracking purposes.

## Prices

Prices are subject to change without notice. Purchases are invoiced as priced on the date of original order.

## Custom Products

Saf-T-Cart will be happy to customize an existing product or create a new product to meet your demands. Custom products may incur special engineering fees.

Customer approval must be made, in writing, before actual production will begin.

Custom items are not included in Saf-T-Cart's standard return policy.

## Freight Terms

Contact Saf-T-Cart for current freight terms.

## Catalog Illustrations

Non-Saf-T-Cart products shown within are used for illustration purposes only.

Saf-T-Cart does not endorse any products. All asterisks denote trademarks.

# UPS Service

Products that fit the dimensions for UPS Ground shipment will have the symbol below next to their picture.




## Durability

Nothing is worse than having those strong rubber tires go flat. That is why Saf-T-Cart uses tires with a no flat sealant. The symbol below will denote carts with this feature.



## Cylinder Accommodation

Carts built with firewalls to separate the cylinders use PermaClamps to hold those cylinders in place. Standard PermaClamps hold Large 9.5" Oxygen and 12.5" Acetylene cylinders. However, if your Acetylene is the smaller 8.75" #4, then you should add a -SM to your cart's order number to receive the smaller PermaClamps. Then again, if you need to hold a 15.5" Propane or Propylene cylinder you need to add a -P to receive the larger PermaClamps.

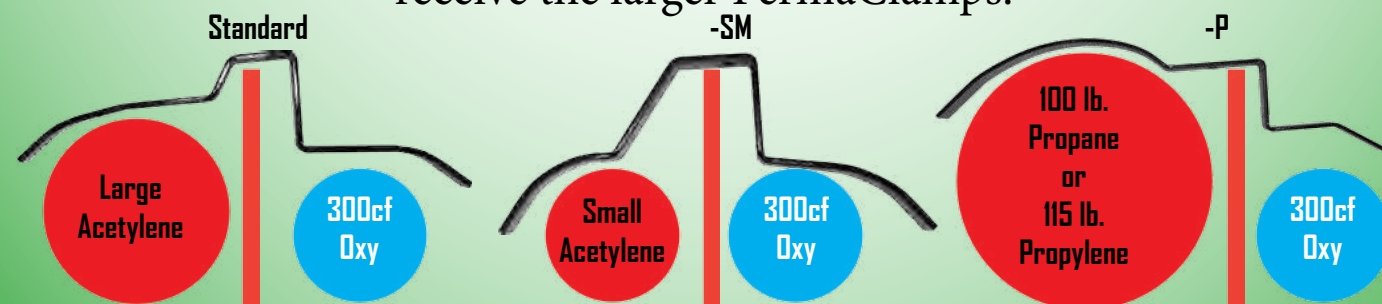

The B-Tote is designed to be an easily portable stand for B cylinders by combining a stable baseplate with an ergonomic handle. The Nitro-40 is designed for a single 20 lb. nitrous oxide cylinder. The 20-10 and 40-10 are designed to carry both a 20cf or 40cf oxygen and a 10cf acetylene.



**B-Tote**  
Baseplate: 9" x 9"  
Height: 27"  
Width: 9"  
Weight: 8 lb.  
Cylinder capacity: 7"



**Nitro-40**  
Baseplate: 9" Diameter  
Height: 27"  
Width: 8"  
Weight: 6 lb.  
Cylinder capacity: 7"



**20-10/40-10 Tote**  
Baseplate: 6" x 10"  
Height: 28"  
Width: 12"  
Weight: 14 lb.  
Cylinder capacity: 3.5", 7"/3.5", 8"

The UCT 1000061 is designed for a small cylinder and comes with nylon straps. The 900-10-8 is the Saf-T-Cart standard small single 80cf cart. The 810-6 is a light duty cart designed with both low and high bands for carrying small to medium oxygen and acetylene cylinders.



**UCT-1000061**  
Height: 38.5"  
Width: 12.5"  
Weight: 13 lb.  
Wheels: SC-2  
Cylinder capacity: 7.5"



**900-10-8**  
Baseplate: 8.25" x 8.25"  
Height: 42"  
Width: 12.5"  
Weight: 12 lb.  
Wheels: SC-4  
Cylinder capacity: 8"



**810-6**  
Baseplate: 8" x 16"  
Height: 42"  
Width: 22"  
Weight: 21 lb.  
Wheels: SC-2  
Cylinder capacity: 7", 8"

With semi-pneumatic tires the 935-8S and 935-8P have ergonomic handles and carry medium cylinders. The 820-8 uses a steel cylinder retaining clamp for two medium sized cylinders.



**ups**  
**935-8S**  
 Baseplate: 8"x18"  
 Height: 45"  
 Width: 21"  
 Weight: 27 lb.  
 Wheels: SC-5  
 Cylinder capacity: 8.5", 8"



**ups**  
**935-8P**  
 Baseplate: 8"x18"  
 Height: 45"  
 Width: 21"  
 Weight: 27 lb.  
 Wheels: SC-4  
 Cylinder capacity: 8.5", 8"



**ups**  
**820-8**  
 Baseplate: 10"x19"  
 Height: 45"  
 Width: 25"  
 Weight: 27 lb.  
 Wheels: SC-5  
 Cylinder capacity: 9.5", 8"

The 820-10 and 821-10 expand on the 820-8 with increased wheel sizes. The 822-10 has two 10" polyolefin wheels, keeping you up and running, flat free.



**ups**  
**820-10**  
 Baseplate: 10"x19"  
 Height: 45"  
 Width: 27"  
 Weight: 32 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5", 8"



**ups**  
**821-10**  
 Baseplate: 10"x19"  
 Height: 45"  
 Width: 30"  
 Weight: 29 lb.  
 Wheels: SC-9A  
 Cylinder capacity: 9.5", 8"




**ups**  
**822-10**  
 Baseplate: 10"x19"  
 Height: 45"  
 Width: 27"  
 Weight: 27 lb.  
 Wheels: SC-7  
 Cylinder capacity: 9.5", 8"

# Saf-T-Cart Firewalls

Exceeding all OSHA specified requirements.

## The Only True Firewall in the Industry

Firewalls become necessary after cylinders sit unused for 24 hours. Instead of removing your cylinders from their carts, try Saf-T-Cart's firewalls. Guaranteed to keep you up and running at the highest safety standards, it's the only true firewall that completely blocks the line of sight between your cylinders.

- Saf-T-Cart firewalls are 60" tall, obstructing the line of sight from your oxygen cylinders to your fuel gas.
- They combine a steel shell with a fiberglass insulation panel to exceed OSHA's 30 minute burn-time specification.
- They are the only firewalls that do not use an air cushion for separation.
- Our firewalls can be sold as a stand-alone product for adding to your existing carts.
- Certification papers are available for your files.
- Many of our products can have a firewall added. Just look for our flame icon next to the product's specs - 



STS-20-FW-2

Firewalls come in a variety of sizes, ranging from single cylinder separators to large cages.



554-30-FW

The 860-14 carries a large oxygen and medium acetylene cylinder. With 16" pneumatic wheels, the 861-16 handles rough terrain. The 863-20 uses 20" steel wheels for excellent pivoting with large loads.



**860-14**  
 Baseplate: 12"x21"  
 Height: 42"  
 Width: 21"  
 Weight: 43 lb.  
 Wheels: SC-10  
 Cylinder capacity: 9.5", 9.5"



**861-16**  
 Baseplate: 12"x21"  
 Height: 42"  
 Width: 27"  
 Weight: 46 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 9.5"



**863-20**  
 Baseplate: 12"x21"  
 Height: 42"  
 Width: 31"  
 Weight: 61 lb.  
 Wheels: SC-13  
 Cylinder capacity: 9.5", 9.5"

Expanding on the 863-20, the 24 has even larger 24" steel wheels to increase the pivot potential with a large load; however, when space is minimal, the 600-10 and 601-10 carts place a large oxygen and medium acetylene cylinder front-to-back to ensure maneuverability in tight spaces.



**863-24**  
 Baseplate: 12"x21"  
 Height: 42"  
 Width: 31"  
 Weight: 61 lb.  
 Wheels: SC-15  
 Cylinder capacity: 9.5", 9.5"



**600-10**  
 Baseplate: 10"x10" and 10"x10"  
 Height: 50"  
 Width: 19"  
 Weight: 42 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5", 9.5"



**601-10**  
 Baseplate: 10"x10" and 10"x10"  
 Height: 50"  
 Width: 21"  
 Weight: 38 lb.  
 Wheels: SC-9A  
 Cylinder capacity: 9.5", 9.5"

The 870-14 is designed to carry large oxygen and large acetylene cylinders. The 871-16 is an upgrade for rough terrain. The 873-20 is designed with steel wheels for easier pivoting of its heavy load.



**870-14**  
 Baseplate: 13"x24"  
 Height: 44"  
 Width: 30"  
 Weight: 46 lb.  
 Wheels: SC-10  
 Cylinder capacity: 9.5", 12.5"



**871-16**  
 Baseplate: 13"x24"  
 Height: 44"  
 Width: 35"  
 Weight: 48 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"



**873-20**  
 Baseplate: 13"x24"  
 Height: 44"  
 Width: 33"  
 Weight: 64 lb.  
 Wheels: SC-13  
 Cylinder capacity: 9.5", 12.5"

The 873-24 has larger 24" steel wheels increasing its pivot potential. One of the original Saf-T-Carts, the 401-14 carries large oxygen and acetylene cylinders. The 402-16 utilizes 16" pneumatic tires. 400 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders. Add a -P.



**873-24**  
 Baseplate: 13"x24"  
 Height: 44"  
 Width: 33"  
 Weight: 66 lb.  
 Wheels: SC-15  
 Cylinder capacity: 9.5", 12.5"



**401-14**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 31"  
 Weight: 55 lb.  
 Wheels: SC-10  
 Cylinder capacity: 9.5", 12.5"



**402-16**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 35"  
 Weight: 55 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"

Designed off of the 401 and 402 series, the 403-20 and 403-24 carts use larger steel wheels. 400 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders. Add a -P.



**403-20**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 33"  
 Weight: 66 lb.  
 Wheels: SC-13  
 Cylinder capacity: 9.5", 12.5"



**403-24**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 33"  
 Weight: 68 lb.  
 Wheels: SC-15  
 Cylinder capacity: 9.5", 12.5"



The 502-16 comes with a toolbox, permaclamps, hose wrap, and rough terrain wheels. The 503-20 and 503-24 utilize different size steel wheels. 500 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders by adding a -P, or 8.5" acetylene cylinders with a -SM.



**502-16**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 35"  
 Weight: 69 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"



**503-20**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 34"  
 Weight: 84 lb.  
 Wheels: SC-13  
 Cylinder capacity: 9.5", 12.5"



**503-24**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 34"  
 Weight: 86 lb.  
 Wheels: SC-15  
 Cylinder capacity: 9.5", 12.5"

The 504-30 has large auto tires with hub and spindles for rough terrain. The 552-16 upgrades by adding a 1,000 lb. lifting eye. The 553-20 utilizes steel wheels. 500 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders with a -P, or 8.5" acetylene cylinders with a -SM.



**504-30**  
 Baseplate: 13"x24"  
 Height: 46"  
 Width: 40"  
 Weight: 114 lb.  
 Wheels: SC-12  
 Cylinder capacity: 9.5", 12.5"



**552-16**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 77 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**553-20**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 88 lb.  
 Wheels: SC-13  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.

The 553-24 utilizes 24" steel wheels. The 554-30 uses a lifting eye. The 552-16H-FW includes a hood, lifting eye, and firewall for protection in the mining industry. 500 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders with a -P, or 8.5" acetylene cylinders with a -SM.



**553-24**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 90 lb.  
 Wheels: SC-15  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**554-30**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 40"  
 Weight: 122 lb.  
 Wheels: SC-12  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**552-16H-FW**  
 Baseplate: 13"x24"  
 Height: 75"  
 Width: 38"  
 Weight: 182 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.


6 \* See Page iv to order the proper cylinder clamps for your size cylinders on your firewalled cart.

\* See Page iv to order the proper cylinder clamps for your size cylinders on your firewalled cart.

The 600-10FW and 613-10FW provide superior protection in shops and confining plants. The 402-16-FW adds a firewall. 400 and 500 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders with a -P, or for 500's, 8.5" acetylene cylinders with -SM.



**600-10FW**  
 Baseplate: 10"x10" and 10"x10"  
 Height: 62"  
 Width: 19"  
 Weight: 95 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5", 10"

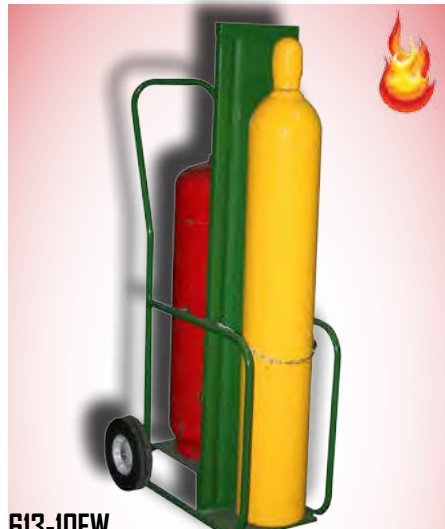

**613-10FW**  
 Baseplate: 13"x12" and 13"x9"  
 Height: 62"  
 Width: 22"  
 Weight: 95 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5", 12.5"



**402-16FW**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 108 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"

The 403-20-FW adds a firewall with steel wheels. The 552-16-FW includes a 1,000 lb. lifting eye for maximum portability. The popular 552-16-FW-101611 uses a 16" semi-pneumatic wheel. 400 and 500 series carts can be widened for 100 lb. Propane or 115 lb. Propylene cylinders. Add a -P.



**403-20FW**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 33"  
 Weight: 119 lb.  
 Wheels: SC-13  
 Cylinder capacity: 9.5", 12.5"



**552-16FW**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 130 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**552-16FW-101611**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 130 lb.  
 Wheels: 101611  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.

The 552-16-FW-FL includes forklift stirrups. The 553-24-FW is a firewalled industrial cart with lifting eye and steel wheels. The 554-30-FW has auto tires for rough terrain. 500 series carts can be widened for 100 lb. propane or 115 lb. propylene cylinders with a -P, or 8.5" acetylene cylinders by -SM.



**552-16FW-FL**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 39"  
 Weight: 161 lb.  
 Wheels: SC-11  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**553-24FW**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 143 lb.  
 Wheels: SC-15  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**554-30FW**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 40"  
 Weight: 175 lb.  
 Wheels: SC-12  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.

The 554-30T-FW-2 includes a 2" Ball hitch. The 554-30T-FW-PP includes a Pull Pin apparatus. Lastly, the 554-30-FW-LE includes an extendable Lunette Eye trailer kit. 500 series carts can be widened for 100 lb. Propane or 115 lb. Propylene cylinders with a -P, or 8.5" acetylene cylinders with a -SM.



**554-30T-FW-2**  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 40"  
 Weight: 230 lbs.  
 Wheels: SC-12  
 Cylinder capacity: 9.5", 12.5"  
 Lifting Eye: 1,000 lb.



**2" Ball**

554-30T-FW-2

**Lunette Eye**



554-30T-FW-LE

**Pull Pin**



554-30T-FW-PP

\* See Page iv to order the proper cylinder clamps for your size cylinders on your firewalled cart.

## The 1324 IIE



The original Saf-T-Cart, the 1324 IIE is designed to secure your entire cutting unit. Equipped with a lockable cabinet, it allows the regulators, torches, and tips to become a part of the unit, eliminating the need to break down and reinstall the unit daily. The firewall version is available.

Comes standard with:

- Lifting Eye
- Permaclamps
- Oxygen and fuel gas fittings
- Flex Pigtails and Fittings for your regulators.

1324 IIE  
 Baseplate: 13"x24"  
 Height: 62"  
 Width: 35"  
 Weight: 115 lb.  
 Wheels: SC-II  
 Cylinder capacity: 10", 12.5"  
 Lifting Eye: 1,000 lb.



The cabinet is designed for easy set up. Add the cutting outfit and regulators and you are on your way!



1324 IIE-C

## Cylinder Sizes

Finding the right product to haul the right cylinders requires you know the right diameter of your cylinders.



### Acetylene

Label	MC	B	#3	#4	#5
Cubic Feet	10 CF	40 CF	75 CF	125 CF	300 CF
Diameter	4"	6"	7"	8"	9"
Height	13"	20"	26"	34"	41"

### Oxygen

Label	MM	D	E	Q,M,S	H,J
Cubic Feet	10 CF	15 CF	24 CF	40-150 CF	200-300 CF
Diameter	3.25"	4"	4"	7"	9.5"
Height	13.5"	20"	30"	35"-53"	56"-60"



### Propane



Pressure	30 lb.	60 lb.	33-44 lb. Forklift
Diameter	11.5"	15"	12"
Height	19"-30"	49"	27"-44"





The 250-0 is designed to deliver single cylinders to any environment quickly and efficiently. Adding quiet casters to a double trailwheel makes the 250-2 ideal for hospitals and labs. The 250-4 upgrades the 250-2 with an easy loading base and tight turn radius.



**250-0**  
 Baseplate: 14"x6"  
 Height: 49"  
 Width: 18"  
 Weight: 22 lb.  
 Wheels: SC-5  
 Cylinder capacity: 9.5"  
 Strap: STP-42



**250-2**  
 Baseplate: 14"x6"  
 Height: 49"  
 Width: 18"  
 Weight: 29 lb.  
 Wheels: SC-5, 100351(caster)  
 Cylinder capacity: 9.5"  
 Strap: STP-42



**250-4**  
 Baseplate: 10"x11.5"  
 Height: 48"  
 Width: 18"  
 Weight: 31 lb.  
 Wheels: SC-5, SC-27(caster)  
 Cylinder capacity: 9.5"  
 Strap: STP-42

The 250-4-M is a 250-4 designed to permanently mount a regulator with pigtail attachment for easy cylinder exchanges. Improving on the 250 series, the 750 single cylinder line is for heavier use in tougher situations. The 750-10-LE includes a lifting eye for added maneuverability.



**250-4-M**  
 Baseplate: 11"x11.5"  
 Height: 48"  
 Width: 18"  
 Weight: 36 lb.  
 Wheels: SC-21, SC-27(caster)  
 Cylinder capacity: 9.5"  
 Strap: STP-42



**750-10**  
 Baseplate: 6"x14"  
 Height: 49"  
 Width: 19"  
 Weight: 33 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5"



**750-10-LE**  
 Baseplate: 6"x14.5"  
 Height: 62"  
 Width: 19"  
 Weight: 46 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5"

The 751-10 adds a pneumatic wheel for harder terrain. The 751-10-SC includes a stair climbing track to help maneuver cylinders across multiple building levels. The 750-20 is ideal for dock movement and is available with trail wheels.



**751-10**  
 Baseplate: 6"x14"  
 Height: 49"  
 Width: 19"  
 Weight: 33 lb.  
 Wheels: SC-9A  
 Cylinder capacity: 9.5"



**750-10-SC**  
 Baseplate: 6"x14"  
 Height: 49"  
 Width: 19"  
 Weight: 42 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5"



**750-20**  
 Baseplate: 9"x17"  
 Height: 49"  
 Width: 20"  
 Weight: 57 lb.  
 Wheels: SC-8  
 Cylinder capacity: 9.5"

The 751-20 uses pneumatic tires for rougher terrain. The 780-10 is ideal for cylinder dock and route environments. Increasing transport potential, the 780-10W widens for three cylinders in fast-paced environments and is available with bigger wheels.



**751-20**  
 Baseplate: 9"x17"  
 Height: 49"  
 Width: 22"  
 Weight: 50 lb.  
 Wheels: SC-9  
 Cylinder capacity: 9.5"



**780-10**  
 Baseplate: 21"x5"  
 Height: 49"  
 Width: 23"  
 Weight: 64 lb.  
 Wheels: SC-9  
 Cylinder capacity: 12.5"



**780-10W**  
 Baseplate: 25"x5"  
 Height: 49"  
 Width: 28"  
 Weight: 68 lb.  
 Wheels: SC-9  
 Cylinder capacity: 12.5"

The 7-900-4P and the 7325-S are designed for various sizes of propane cylinders. An adjustable hook allows the LCT-12-6 to load and carry a variety of liquid cylinders easily.



**7-900-4P**  
Baseplate: N/A  
Height: 55"  
Width: 29"  
Weight: 51 lb.  
Wheels: 101222



**7325-S**  
Baseplate: N/A  
Height: 51"  
Width: 25"  
Weight: 30 lb.  
Wheels: 101222



**LCT-12-6**  
Height: 63" (vertical measurement)  
Width: 20"  
Weight: 119 lb.  
Wheels: SC-34, SC-31(casters), LCTFR(front)  
Cylinder Capacity: 20"  
Hook: 53.5"-58.5"

With a low front-loading platform to prevent slamming scales, the EZ Load 4L moves easily over good terrain. The Cryo 8860 has four ultra-quiet casters. The CT design transports cylinders quickly through any location without forklift access. Manifolds are available upon request.



**EZ Load 4L**  
Height: 48"  
Width: 29"  
Weight: 79 lb.  
Wheels: SC-33, SC-25(caster)  
Cylinder Capacity: 20"



**Cryo 8860**  
Baseplate: 22"x22"  
Height: 6"  
Width: 33"  
Weight: 65 lb.  
Wheels: 100351  
Cylinder Capacity: 20"



**CT-6/CT-8**  
Height: 34"  
Width: 53"/63"  
Weight: 115 lb./145lb.  
Wheels: SC-25, SC-26  
Cylinder capacity: 9.5"

The 730-12F upgrades the 730-12 (featured below) into a foldable version for a smaller footprint on vehicles.



**730-12F**  
Baseplate: 9"x21"  
Height: 53"  
Width: 32"  
Weight: 115 lb.  
Wheels: SC-34, SC-36(caster)  
Cylinder capacity: 19.5"  
Strap: STP-45



The 730-12 is designed to transport either a single liquid cylinder or two high pressure cylinders easily. The third wheel provides support for heavy, bulky, and unwieldy loads.



**730-12**  
Baseplate: 9"x21"  
Height: 53"  
Width: 32"  
Weight: 115 lb.  
Wheels: SC-34, SC-36(caster)  
Cylinder capacity: 19.5"  
Strap: STP-45

Built with 14 gauge tubing and a 1/4" baseplate, the 701 series begins the Saf-T-Cart line of durable hard goods delivery carts. Altering the handle design of the 701 for greater control creates the 702 series. Changing to a continuous steel frame for even greater control makes the 704 series.



**701/701-10**  
 Baseplate: 14"x10"  
 Height: 49"  
 Width: 19"/22"  
 Weight: 39 lb./33 lb.  
 Wheels: SC-8/SC-9A



**702/702-10**  
 Baseplate: 14"x10"  
 Height: 49"  
 Width: 19"/22"  
 Weight: 39 lb./32 lb.  
 Wheels: SC-8/SC-9A



**704/704-10**  
 Baseplate: 14"x10"  
 Height: 49"  
 Width: 19"/22"  
 Weight: 39 lb./33 lb.  
 Wheels: SC-8/SC-9A

Lastly, with a higher profile for taller loads, the Jim Dandy is strong enough for the toughest jobs.



**Jim Dandy**  
 Baseplate: 14"x10"  
 Height: 54"  
 Width: 20"  
 Weight: 52 lb.  
 Wheels: SC-8



The EZ Wheel is perfect for moving a single E medical cylinder with regulator around a home. Using an adjustable handle, the MDE-6X is also designed for in-home use with a D or E size cylinder. The MDE-8 and MDE-8P provide more rugged versions of the MDE-6X.



**EZ Wheel**  
 Height: 6"  
 Width: 10"  
 Weight: 2 lb.  
 Wheels: SC-2A  
 Cylinder capacity: 4.5"



**MDE-6X**  
 Height: 38"  
 Width: 12"  
 Weight: 5 lb.  
 Wheels: SC-2B  
 Cylinder capacity: 4.5"



**MDE-8/MDE-8P**  
 Height: 40"/40"  
 Width: 12"  
 Weight: 11 lb.  
 Wheels: SC-5/SC-4  
 Cylinder capacity: 4.5"

The D/E Medical cart line, made from 1" to 1/2" square tubing, can be made as carts or simple stands for storage use. The MDE-2 and MDE-2S begin this line. The MDE-4 continues with a four cylinder configuration.



**MDE-2**  
 Height: 35"  
 Dimensions: 12"x15.5"  
 Weight: 15 lb.  
 Wheels: SC-5  
 Cylinder capacity: 4.5"



**MDE-2S**  
 Height: 21"  
 Dimensions: 6.75"x17.5"  
 Weight: 8 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"



**MDE-4**  
 Height: 35"  
 Dimensions: 15.5"x19"  
 Weight: 23 lb.  
 Wheels: SC-5  
 Cylinder capacity: 4.5"

The MDE-4S makes a stand of the MDE-4. The MDE-6 and MDE -6S upgrade to six D or E cylinders.



**MDE-4S**  
 Height: 21"  
 Dimensions: 11.75"x13.5"  
 Weight: 15 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"



**MDE-6**  
 Height: 35"  
 Dimensions: 18.5"x21.5"  
 Weight: 25 lb.  
 Wheels: SC-5  
 Cylinder capacity: 4.5"



**MDE-6S**  
 Height: 21"  
 Dimensions: 12"x18.5"  
 Weight: 18 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"

The MDE-12 is designed for faster moving medical facilities and the MDE-12S for group storage. The MDE-24 moves into large scale distribution of D/E medical cylinders.



**MDE-12**  
 Height: 37"  
 Dimensions: 16.5"x23.5"  
 Weight: 47 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"



**MDE-12S**  
 Height: 21"  
 Dimensions: 16.5"x23.5"  
 Weight: 27 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"




**MDE-24**  
 Height: 37"  
 Dimensions: 21.5"x33.5"  
 Weight: 60 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"


The MDE-24T moves two dozen D/E cylinders while protecting vulnerable gauges and valves from above. The MDE-24S starts the large scale storage of D and E cylinders. The MDE-36 expands to provide serious medical cylinder transportation.



**MDE-24T**  
 Height: 43"  
 Dimensions: 21.5"x33.5"  
 Weight: 60 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"

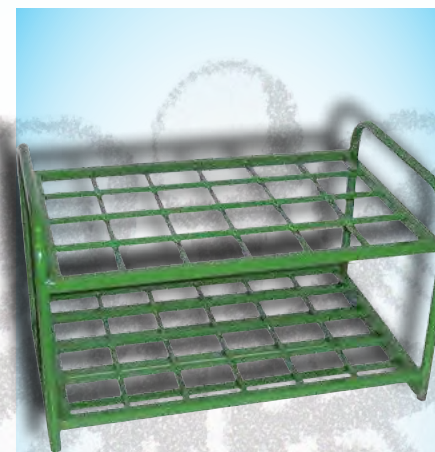


**MDE-24S**  
 Height: 21"  
 Dimensions: 21.5"x33.5"  
 Weight: 27 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"

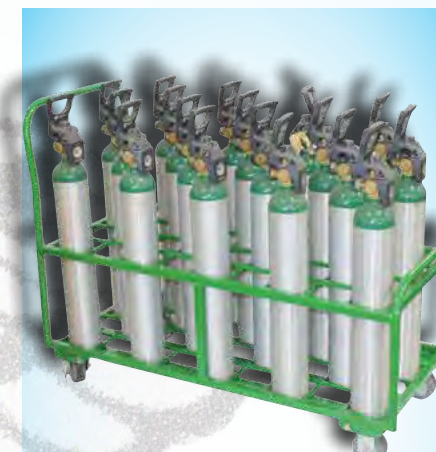

**MDE-36**  
 Height: 37"  
 Dimensions: 21.5"x49"  
 Weight: 73 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"

The MDE-36S holds 36 D and E cylinders bolted to the floor for safety. Once quantities of D and E cylinders reach the 40s and 50s it becomes necessary to consider space. The MDE-50H and MDE-50HS series help to conserve space.

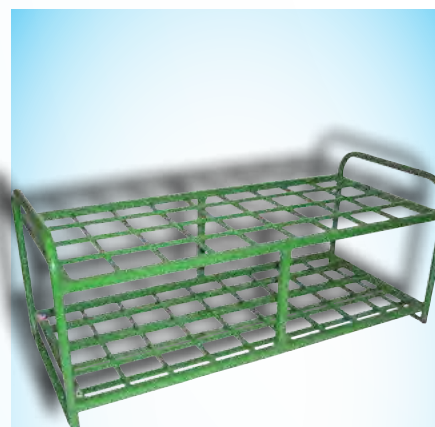

**MDE-36S**  
 Height: 21"  
 Dimensions: 21.5"x49"  
 Weight: 55 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"




**MDE-50H**  
 Height: 78"  
 Dimensions: 27"x38"  
 Weight: 246 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"




**MDE-50HS**  
 Height: 72"  
 Dimensions: 27"x31.25"  
 Weight: 230 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"

The MDE-50V series is simply concerned with bulk transportation. The MDE-50VS is concerned only with large bulk storage of D and E cylinders.

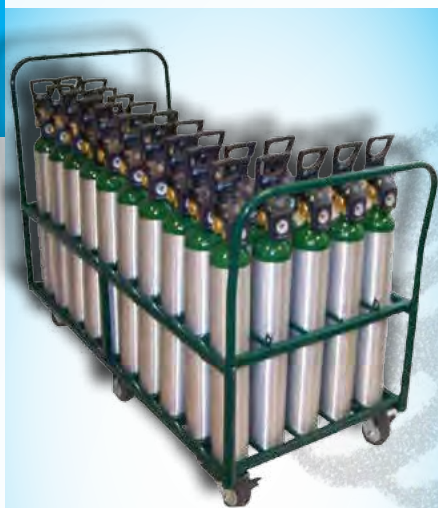

**MDE-50V**  
 Height: 38"  
 Dimensions: 26.5"x53.5"  
 Weight: 116 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"

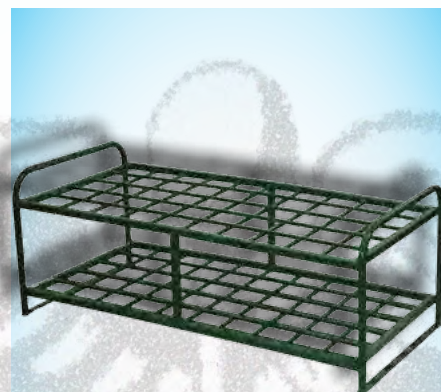

**MDE-50VS**  
 Height: 21"  
 Dimensions: 26.5"x53.5"  
 Weight: 103 lb.  
 Wheels: Stand  
 Cylinder capacity: 4.5"



The MM6-6 series stores M6 3.2" diameter cylinders with ease. All MM6 carts and stands, built with 1" to 1/2" tubing, store cylinders on elevated shelves to keep in easy reach. The MM6-6 and MM6-6S, the smallest of the line, hold six cylinders. The MM6-12 moves up to a dozen cylinders.



**MM6-6**  
 Height: 38"  
 Dimensions: 13.5"x20.5"  
 Weight: 43 lb.  
 Wheels: SC-5  
 Cylinder capacity: 3.5"



**MM6-6S**  
 Height: 21"  
 Dimensions: 9.5"x15.5"  
 Weight: 39 lb.  
 Wheels: Stand  
 Cylinder capacity: 3.5"




**MM6-12**  
 Height: 38"  
 Dimensions: 13.5"x19.5"  
 Weight: 49 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 3.5"

The MM6-12S increases to a dozen cylinders safely stored. The MM6-24 and MM6-24S increase the bulk transport and storage potential of your medical operation.



**MM6-12S**  
 Height: 21"  
 Dimensions: 13.5"x19.5"  
 Weight: 19 lb.  
 Wheels: Stand  
 Cylinder capacity: 3.5"

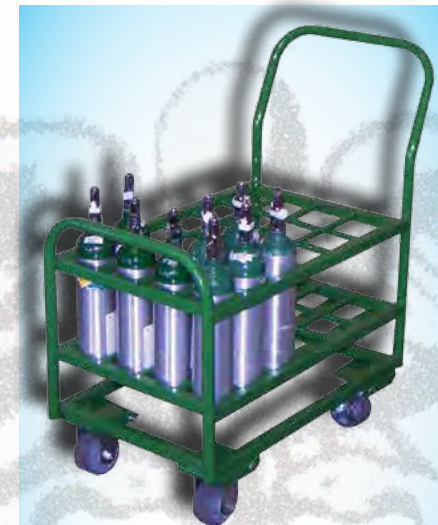

**MM6-24**  
 Height: 38"  
 Dimensions: 17.5"x25.5"  
 Weight: 51 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 3.5"




**MM6-24S**  
 Height: 21"  
 Dimensions: 17.5"x25.5"  
 Weight: 36 lb.  
 Wheels: Stand  
 Cylinder capacity: 3.5"

The MM6-36 and MM6-36S are the largest M6 cylinder transport and storage items most facilities need; however, the MM6-60 was designed for those facilities who have a much larger need.



**MM6-36**  
 Height: 38"  
 Dimensions: 17.75"x38"  
 Weight: 57 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 3.5"

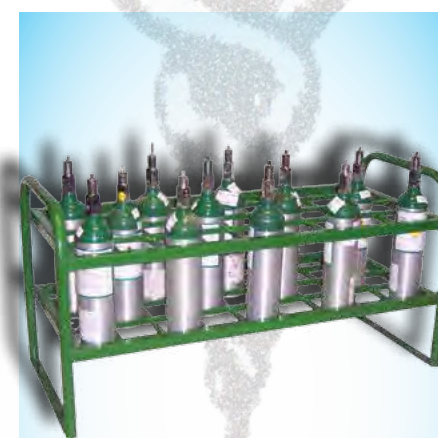


**MM6-36S**  
 Height: 21"  
 Dimensions: 17.75"x38"  
 Weight: 44 lb.  
 Wheels: Stand  
 Cylinder capacity: 3.5"



**MM6-60**  
 Height: 38"  
 Dimensions: 25.5"x41.75"  
 Weight: 90 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 3.5"

The MM6-60S is designed for those facilities that need large and immediate cylinder stock available at all times.

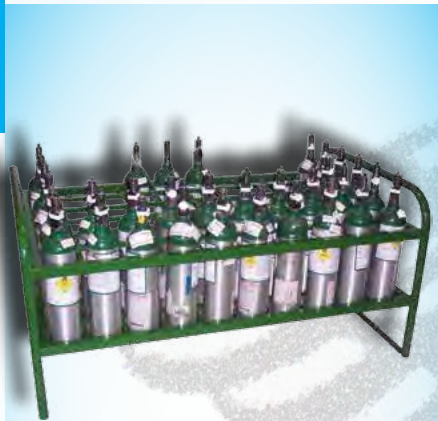

**MM6-60S**  
 Height: 21"  
 Dimensions: 25.5" x 41.75"  
 Weight: 71 lb.  
 Wheels: Stand  
 Cylinder capacity: 3.5"



Quiet casters, a double trailwheel, and an easy loading base make the 250-4 ideal for hospitals and labs. The 250-4-M is designed to permanently mount a regulator with pigtail attachment for easy cylinder exchanges. An adjustable hook allows the LCT-12-6 to load and carry a variety of liquid cylinders.



**250-4**  
 Baseplate" 10" x 11.5"  
 Height: 48"  
 Width: 18"  
 Weight: 31 lb.  
 Wheels: SC-5, SC-27(caster)  
 Cylinder capacity: 9.5"  
 Strap: STP-42



**250-4-M**  
 Baseplate" 11" x 11.5"  
 Height: 48"  
 Width: 18"  
 Weight: 36 lb.  
 Wheels: SC-21, SC-27(caster)  
 Cylinder capacity: 9.5"  
 Strap: STP-42



**LCT-12-6**  
 Height: 63" (vertical measurement)  
 Width: 20"  
 Weight: 119 lb.  
 Wheels: SC-34, SC-31(casters), LCTFR(front)  
 Cylinder Capacity: 20"  
 Hook: 53.5"-58.5"

# Saf-Top

The Saf-Top is the newest innovation from Saf-T-Cart to protect your medical cylinders during transportation and storage. Made from lined canvas, the material is sturdy and tear-proof, providing yet another means we can help you keep your medical cylinders looking professional.


- The Saf-Top is designed to fit on existing carts; thus there is no need to purchase new compatible carts.
- It protects cylinders from the elements and straps down using side-release buckles.

SAF-TOP-24



- It comes in 12 and 24 cylinder sizes. (Other sizes available by special order.)
- The Saf-Top surpasses DOT compliance.
- It can hold the weight of cylinders even upside-down.



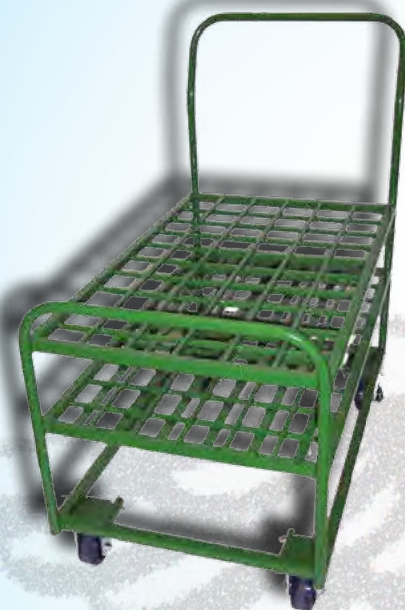

Medical operations often need large numbers of oxygen cylinders stored and distributed on a regular basis. The MM6-60 and MM6-60S (stand) were designed to handle this need. With a simple design and an elevated base-plate, those cylinders can be moved with minimal effort.

**MM6-60**  
 Height: 38"  
 Dimensions: 25.5"x41.75"  
 Weight: 90 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 3.5"

Designed to reduce the footprint of your bulk oxygen cylinder carts and storage racks, the MDE-50H and MDE-50HS are ideal for tight medical space. Easily maneuvering in narrow hallways or storage in smaller rooms, the design has proven very popular.

**MDE-50H**  
 Height: 78"  
 Dimensions: 27"x38"  
 Weight: 246 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"



The AC-54-L is a utility wagon for transporting mass quantities of medical cylinders with ease. Using ratchet straps for security and optional nesting dividers for minimizing damage, cylinders arrive at their destination safely.

**AC-54-L**  
 Height: 46"  
 Dimensions: 32"x42"  
 Weight: 293 lb.  
 Wheels: SC-53, SC-54  
 Cylinder capacity: 4.5"  
 Strap: STP-BLUE



Upgrading an AC-54 with a top and doors allows additional security and decreased opportunity for loss of cargo.

**AC-54TD**  
 Height: 46"  
 Dimensions: 32"x42"  
 Weight: 328 lb.  
 Wheels: SC-53, SC-54  
 Cylinder capacity: 4.5"  
 Strap: STP-BLUE



The standard Utility Wagon, and the AC-60, are both designed to carry D, E, and larger cylinders easily. Both wagons feature Saf-T-Cart's E-Track strapping system. The AC-60 is larger and features a removable left side.

**Utility Wagon/AC-60**  
 Height: 38"/44"  
 Dimensions: 21.75"x40.25"/22"x40"  
 Weight: 131 lbs./200 lb.  
 Wheels: SC-31, SC-32  
 Cylinder capacity: 3.5"  
 Strap: 5304-SEF

Large medical operations consider movement and protection of oxygen cylinders a priority. Moving cylinders safely requires specialized equipment. The MDE-24T moves two dozen D/E cylinders and protects vulnerable gauges and valves from above.

**MDE-24T**  
 Height: 35"  
 Dimensions: 21.5"x34"  
 Weight: 60 lb.  
 Wheels: SC-23, SC-24  
 Cylinder capacity: 4.5"



# Saf-T-Coating

## Protecting Your Cylinder Investments

Saf-T-Cart's Saf-T-Coating coats carts in a plasticized layer, replacing the traditional powder-coated paint. This eliminates any damaging contact experienced by your cylinders, significantly decreasing the amount of time they spend out of circulation.



The Saf-T-Coating process ensures that your cylinders retain their professional, pharmaceutical appearance by eliminating scratching and chipping. Additionally, Saf-T-Coating reduces the amount of noise a loaded cart makes, ensuring quiet transportation through hospitals and labs.

Every cart, from small, one cylinder carts, to the largest sixty cylinder stands, in Saf-T-Cart's medical line, is available for Saf-T-Coating.



MM6-12-R

In addition to labs and hospitals, where a professional appearance is essential, Saf-T-Coating is perfect for transporting medical cylinders. The MM6-12-R is a cylinder cart designed to transport 12 medical cylinders in Saf-T-Coated slots, ensuring a safe and undamaged delivery. Try Saf-T-Coating on your next order. You won't be disappointed.



The MDE-12R, designed for bustling medical facilities, has Saf-T-Coating to help guarantee the life of the cylinders and reduce noise in operating/convalescent environments.



MDE-12R  
Height: 35"  
Dimensions: 17.5"x26.75"  
Weight: 55 lb.  
Wheels: SC-23, SC-24  
Cylinder capacity: 4.5"



Large medical facilities often require oxygen to be moved quickly and efficiently. This often precludes concern for noise and scuffing; however, the MDE-36R helps to reduce both concerns while transporting bulk oxygen.

MDE-36R  
Height: 38"  
Dimensions: 22.5"x55.5"  
Weight: 81 lb.  
Wheels: SC-23, SC-24  
Cylinder capacity: 4.5"

The AC-54-L-R is improved with Saf-T-Coating. Less scuffing and less noise makes this cart a favorite. Using ratchet straps and optional nesting dividers for minimizing damage, cylinders arrive at their destination safely.



AC-54-L-R  
Height: 46"  
Dimensions: 33"x43"  
Weight: 293 lb.  
Wheels: SC-53, SC-54  
Cylinder capacity: 4.5"  
Straps: STP-BLUE



The MC-61 accommodates a 110 volt welding machine and an 8.25" cylinder, with semi-pneumatic wheels and swivel casters. Ideal for mini-migs, the MM-7 ships and assembles easily. The MM-8 is designed for mini-migs, inverters, and plasma machines with a 9.5" cylinder.



**ups**  
 MC-61  
 Height: 19"  
 Width: 17"  
 Weight: 23 lb.  
 Welder Platform: 16"x12"  
 Cylinder capacity: 8.25"  
 Shelf Height: 10"  
 Wheels: SC-2A, SC-20(casters)



**ups**  
 MM-7  
 Height: 22"  
 Width: 14.5"  
 Weight: 41 lb.  
 Welder Platform: 10"x24"  
 Cylinder Capacity: 8.25"  
 Shelf Height: 17"  
 Wheels: SC-7, SC-22A (casters)



**ups**  
 MM-8  
 Height: 17"  
 Width: 17"  
 Weight: 48 lb.  
 Welder Platform: 28"x13"  
 Cylinder Capacity: 9.5"  
 Shelf Height: 10"  
 Wheels: SC-18, SC-20(casters)

The MM-8-II is designed to replace the MM-8 with an easy to ship and assemble version. The MIV-9 is designed for small migs, inverters, feeders, and ships and assembles easily. Again, shipping easily, the MIV-II carries two cylinders, an inverter, and feeder.



**ups**  
 MM-8-II  
 Height: 24.5"  
 Width: 20"  
 Weight: 55 lb.  
 Welder Platform: 14.5x21"  
 Cylinder Capacity: 8.25"  
 Shelf Height: 19.5"  
 Wheels: SC-7, SC-22A (casters)



**ups**  
 MIV-9  
 Height: 26.5"  
 Width: 22"  
 Weight: 74 lb.  
 Welder Platform: 16"x29"  
 Cylinder Capacity: 9.5"  
 Shelf Height: 21"  
 Wheels: SC-21, SC-22A (casters)



**ups**  
 MIV-II  
 Height: 30"  
 Width: 30"  
 Weight: 85 lb.  
 Welder Platform: 24"x26"  
 Cylinder Capacity: 9.5", 9.5"  
 Shelf Height: 28  
 Wheels: SC-21, SC-22A (casters)

The Universal Feeder Cart (UFC) is designed for mobility on shop floors and holds most feeders on the market today. The RG-16-3 holds engine driven welding machines on a central pivot point.



**ups**  
 UFC  
 Height: 34.25"  
 Width: 16"  
 Weight: 32 lb.  
 Welder Platform: 32"x12"  
 Wheels: SC-16



**ups**  
 RG-16-3  
 Height: 29"  
 Width: 40"  
 Weight: 114 lb.  
 Welder Platform: 21.5"x38"  
 Wheels: SC-11, 109844 (caster)



The TRL-SM-2012 is a bolt-together *ARC-LINER*<sub>™</sub> series trailer that will hold most engine driven welders and powerplant generators. Comes standard with a 2" ball. Optional equipment includes: 301S cylinder stand, lunette eye hitch, pull-pin hitch, larger wheels.



TRL-SM-2012-175 (as shown)  
 or -205 large wheel.  
 Height: 27"  
 Width: 58"  
 Weight: 410 lb.

Wheels: SC-175 - 24"x6.6", 4ply, 5 lug  
 pneumatic, 1100lb. weight cap.  
 or (alternate) -  
 SC-205 - 26.3"x7.8", 4ply, 5 lug  
 pneumatic, 1430lb. weight cap.



The 260 stand combines a stable base with a plasma cut frame to create a safe single-cylinder design. The 260-1 and 260-1S are lighter single-cylinder frames. The 301S, either mounted or free-standing, holds two medium oxy/acetylene cylinders.



**260**  
Height: 18.5"  
Width: 14"  
Weight: 24 lb.  
Cylinder capacity: 9.5"  
Straps: STP-42



**260-1/260-1S**  
Height: 36"/28"  
Width: 18"  
Weight: 14 lbs./13 lb.  
Cylinder capacity: 9.5"



**301S**  
Baseplate: 21"x12"  
Height: 29"  
Width: 21"  
Weight: 20 lb.  
Cylinder capacity: 9.5", 9.5"

The 401S, either mounted or free-standing, holds two large oxy/acetylene cylinders. The CR series is designed as stationary racks. The CR-1, CR-4, and CR-6 racks hold cylinders in a single bay. The CR-8 is the first of its line to expand into two four cylinder bays.



**401S**  
Baseplate: 13"x24"  
Height: 29"  
Width: 26"  
Weight: 24 lb.  
Cylinder capacity: 12.5", 9.5"



**CR-1/CR-4/CR-6**  
Height: 36"  
Width: 13"/23"/33"  
Weight: 25 lb./33 lb./36 lb.  
Depth: 11.5"/21.5"/21.5"  
Cylinder capacity: 9.5" (1/4/6)



**CR-8**  
Height: 36"  
Width: 45"  
Weight: 49 lb.  
Depth: 21.5"  
Cylinder capacity: 9.5" (8)

The CR-12 is the largest in the CR series with two six cylinder bays. The CR-500 is designed as a dual cylinder storage unit capable of quick and easy transportation. The CR-550 improves the design with a 1,000 lbs. lifting eye.



**CR-12**  
Height: 36"  
Width: 65"  
Weight: 55 lb.  
Depth: 21.5"  
Cylinder capacity: 9.5" (12)



**CR-500**  
Baseplate: 13"x24"  
Height: 36"  
Width: 27"  
Weight: 60 lb.  
Cylinder capacity: 9.5"x12.5"



**CR-550**  
Baseplate: 13"x24"  
Height: 62"  
Width: 27"  
Weight: 63 lb.  
Cylinder capacity: 9.5", 12.5"  
Lifting Eye: 1,000 lbs.

The CR-550-FW keeps the lifting eye and inserts a firesafety fireboard exceeding OSHA requirements. Designed for maneuverability, the CD-4 functions like a small pallet. The CD-6 functions like a six cylinder pallet.



**CR-550-FW**  
Baseplate: 13"x24"  
Height: 62"  
Width: 27"  
Weight: 110 lb.  
Cylinder capacity: 9.5", 12.5"  
Lifting Eye: 1,000 lbs.



**CD-4**  
Height: 36"  
Width: 36"  
Depth: 23.5"  
Weight: 150 lb.  
Cylinder capacity: 9.5" (4)  
Strap: 5304-SEF



**CD-6**  
Height: 36"  
Width: 36"  
Depth: 34.5"  
Weight: 180 lb.  
Cylinder capacity: 9.5" (6)  
Strap: 5304-SEF

The CD-8 seats eight cylinders in four cylinder sections divided by a bar. Using heavy channel and flat iron, Saf-T-Cart's wall brackets secure cylinders to wall mounts with an alligator clip. The F series wall mounts use curved and folded steel for a tight fit. Firewalls optional for all brackets.



**CD-8**  
 Height: 36"  
 Width: 36"  
 Depth: 44.5"  
 Weight: 200 lb.  
 Cylinder capacity: 9.5" (8)  
 Strap: 5303-SEF



**WB-101/WB-202/WB-303**  
 Height: 3"  
 Width: 14"/28"/42"  
 Weight: 4 lb./9 lb./13 lb.  
 Cylinder capacity: 10" (1/2/3)  
 Strap: STP-42



**WB-F101/WB-F202/WB-F303**  
 Height: 3"  
 Width: 14"/28"/42"  
 Weight: 4 lb./9 lb./13 lb.  
 Cylinder capacity: 10" (1/2/3)  
 Strap: STP-42

Built with a dividing firewall, forklift tubes, and hard-goods straps, the 4L-100-FW stores, transports, and separates with a firewall, any two cylinders in your inventory.



**4L-100-FW**  
 Baseplate: 21.75"x21.75"  
 Height: 76"  
 Width: 34"  
 Depth: 42"  
 Weight: 260 lb.  
 Straps: STP-45  
 Lifting Eye: 1,000 lbs.



Designed as economical storage and security, the ESTS-9 holds nine cylinders inside sheet metal sides with a lockable expanded metal door. E-Track ratchet straps secure the contents.

**ESTS-9**  
 Height: 72"  
 Width: 32"  
 Depth: 32"  
 Weight: 292 lb.  
 Cylinder capacity: 9.5" (9)  
 Strap: 5304-SEF

The ESTS-12 holds twelve cylinders inside sheet metal sides with a lockable expanded metal door. E-Track ratchet straps secure the contents.



**ESTS-12**  
 Height: 72"  
 Width: 32"  
 Depth: 42"  
 Weight: 345 lb.  
 Cylinder capacity: 9.5" (12)  
 Strap: 5304-SEF

The STS-9 stores nine cylinders inside a cage with a forklift bottom, bar grate flooring, 7 gauge steel top, and lifting eye for portability.



**STS-9**  
 Height: 85"  
 Width: 32"  
 Depth: 32"  
 Weight: 429 lb.  
 Cylinder capacity: 9.5" (9)  
 Strap: 5304-SEF  
 Forklift Tubes: 3" x 6"

The STS-12 stores a dozen cylinders inside a cage with a forklift bottom, bar grate flooring, 7 gauge steel top, and lifting eye for portability.



**STS-12**  
 Height: 85"  
 Width: 32"  
 Depth: 42"  
 Weight: 494 lb.  
 Cylinder capacity: 9.5" (12)  
 Strap: 5304-SEF  
 Forklift Tubes: 3"x6"



The STS-12-FW-2 expands on the STS with the ability to store and separate oxygen cylinders from acetylene using an OSHA compliant firewall and two separate doors.



**STS-12-FW-2**  
 Height: 85"  
 Width: 32"  
 Depth: 42"  
 Weight: 663 lb.  
 Cylinder capacity: 9.5", 12.5"  
 Strap: 5304-SEF  
 Forklift Tubes: 3"x6"



The STS-20 holds 20 cylinders inside a cage with a forklift bottom, tread plate flooring, 7 gauge steel top, and uses four-point lifting ears in place of the eye.



**STS-20**  
 Height: 79"  
 Width: 50"  
 Depth: 50"  
 Weight: 692 lb.  
 Cylinder capacity: 9.5" (20)  
 Strap: 5308-SEF



The STS-20-FW-2 expands on the STS-20 by separating oxygen from acetylene using an OSHA compliant firewall.



**STS-20-FW-2**  
 Height: 79"  
 Width: 50"  
 Depth: 50"  
 Weight: 950 lb.  
 Cylinder capacity: 9.5", 12.5"  
 Strap: 5308-SEF



The Security Cage is designed to transport and store nitrous cylinders in a lockable box built on a pallet made for your trailer. This ensures fast, safe, and secure delivery following all regulations.

**Security (Nitrous) Cage**  
 Height: 74"  
 Width: 42"  
 Depth: 39"  
 Weight: 470 lb.  
 Cylinder capacity: 9.5" (16)  
 Strap: STP-15

The Pallet Box is a fully enclosed goods and storage delivery box that is designed to sit on an existing pallet in your inventory. It comes equipped with two doors and two shelves. Pallet is not included.



**Pallet Box**  
 Height: 63"  
 Width: 38"  
 Weight: 618 lb.



The LP-12 is essentially a converted ESTS cage with shelves designed to hold 20lb. propane cylinders. With crimped sheet metal siding and the ability to be bolted to the floor, your propane is easily secured.

LP-12  
 Height: 72"  
 Width: 32"  
 Depth: 32"  
 Weight: 230 lb.  
 Cylinder capacity: 20lb. (12)

The LP-18 is essentially a converted ESTS cage with shelves designed to hold 20lb. propane cylinders. With crimped sheet metal siding and the ability to be bolted to the floor, your propane is easily secured.



LP-18  
 Height: 72"  
 Width: 32"  
 Depth: 42"  
 Weight: 255 lb.  
 Cylinder capacity: 20lb. (18)

The SPC-4 is a lockable storage rack for four 33lb. to 44lb. propane cylinders. Stationary pins hold each cylinder in place to maintain the upright position of the safety valves.

SPC-4  
 Height: 39"  
 Width: 33"  
 Depth: 36"  
 Weight: 135 lb.  
 Cylinder capacity: 33-44 lb. (4)

The SPC-8 is a lockable storage rack for eight 33lb. to 44lb. propane cylinders. Stationary pins hold each cylinder in place to maintain the upright position of the safety valves.

SPC-8  
 Height: 70"  
 Width: 33"  
 Depth: 36"  
 Weight: 174 lb.  
 Cylinder capacity: 33-44 lb. (8)




Designed for bulk jobs, the SPC-12 is a lockable rack for twelve 33lb. to 44lb. propane cylinders. Stationary pins hold each cylinder in place to maintain the upright position of the safety valves.

SPC-12  
 Height: 70"  
 Width: 48"  
 Depth: 36"  
 Weight: 280 lb.  
 Cylinder capacity: 33-44 lb. (12)

The SPC-16, a great addition to any forklift fleet, is a lockable storage rack for sixteen 33lb. to 44lb. propane cylinders. Stationary pins hold each cylinder in place to maintain the upright position of the safety valves.

SPC-16  
 Height: 70"  
 Width: 60"  
 Depth: 36"  
 Weight: 285 lb.  
 Cylinder capacity: 33-44 lb. (16)



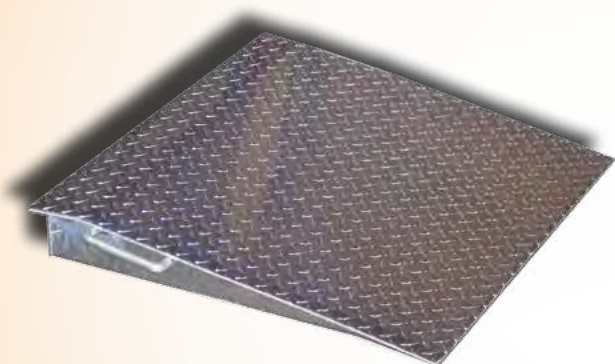

Customizable aluminum dock ramps provide a lightweight and portable way to enhance any pallet. Made to order for your pallet type.


Dock Ramps  
Baseplate: 24" x 24"  
Weight: 20 lb.

Using a 3/16" diamond tread steel base plate and variable strap positions, the STP-16 works seamlessly with Saf-T-Cart pallet trailers.

STP-16  
Height: 39"  
Width: 42"  
Depth: 39"  
Weight: 240 lb.  
Cylinder capacity: 9.5" (16)



The 'TX' version includes a built-in ramp.

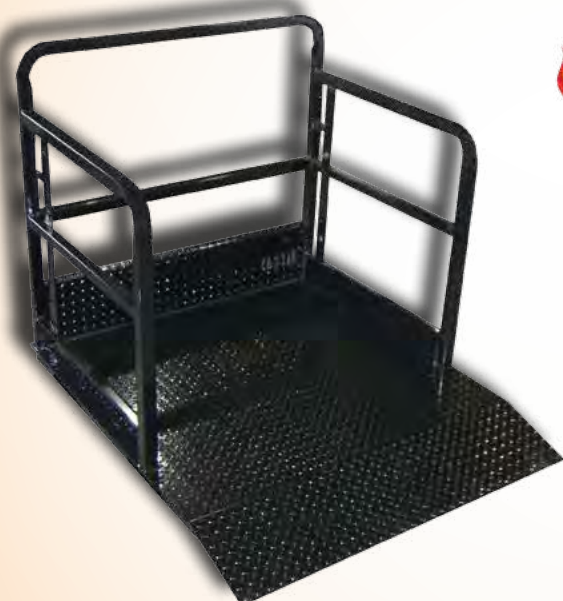

STP-16-TX  
Height: 39"  
Width: 42"  
Depth: 48"  
Weight: 250 lb.  
Cylinder capacity: 9.5" (16)

A sideless counterpart to our regular pallets, the STP-16-B saves weight.

STP-16-B  
Height: 39"  
Width: 42"  
Depth: 39"  
Weight: 225 lb.  
Cylinder capacity: 9.5" (16)





Doubling your storage potential for propane and smaller cylinders, the DP-16 has a foldable shelf for variability.

DP-16  
Height: 64.75"  
Width: 42"  
Depth: 39"  
Shelf Height: 35"  
Weight: 424 lb.  
Cylinder capacity: 4.5" or 33-44 lb.

Designed for Airgas style pallet trailers, the STP-16B-AG includes four-sided forklift access.

STP-16B-AG  
Height: 39"  
Width: 48"  
Depth: 46"  
Weight: 240 lb.  
Cylinder capacity: 9.5" (18)

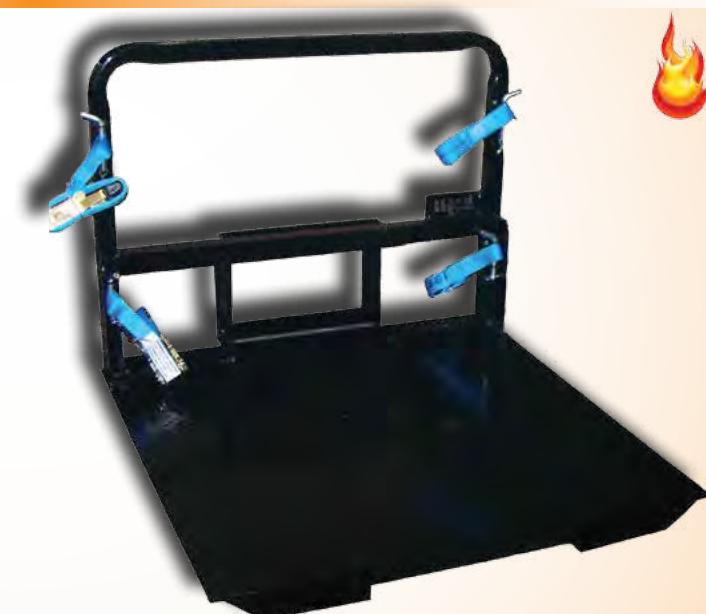

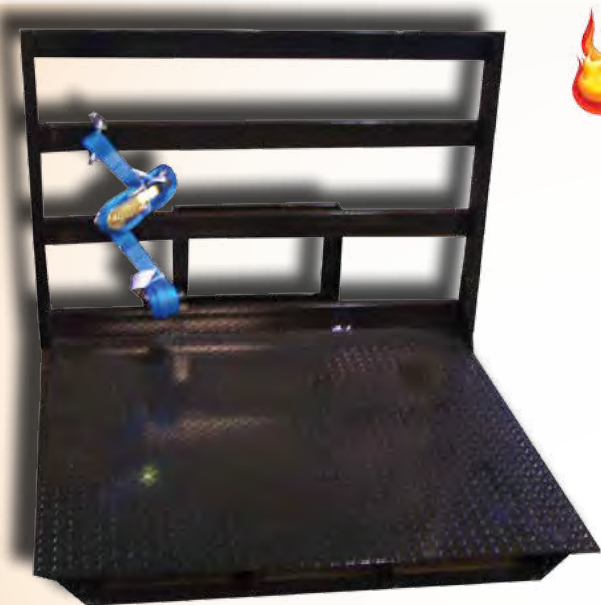

Designed for Post Airgas style trailers, the STP-16B-AG-POST also includes four-sided forklift access.

STP-16B-AG-POST  
 Height: 39"  
 Width: 51"  
 Depth: 46"  
 Weight: 240 lb.  
 Cylinder capacity: 9.5" (18)


The STP-16-AP is designed for Air Products style trailers and includes the same four-sided forklift access.

STP-16-AP  
 Height: 40"  
 Width: 46"  
 Depth: 36.5"  
 Weight: 250 lb.  
 Cylinder capacity: 9.5" (16)




With a 7 gauge smooth floorplate the STP-16-BOC was designed for BOC style trailers.

STP-16-BOC  
 Height: "  
 Width: 47.5"  
 Depth: 32.5"  
 Weight: 240 lb.  
 Cylinder capacity: 9.5" (16)

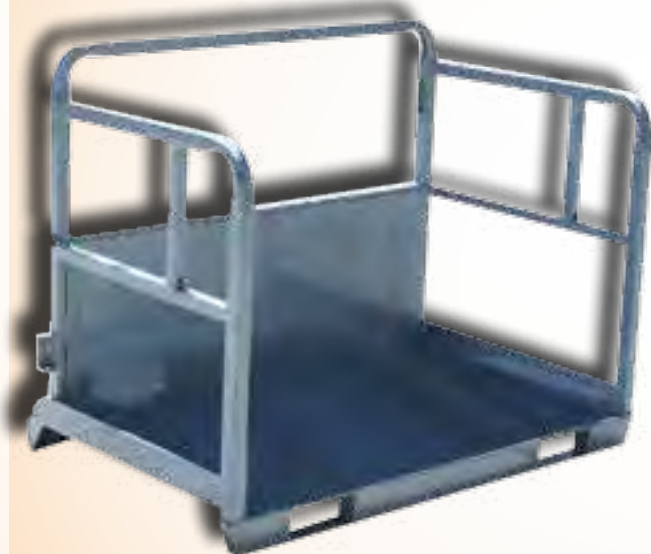

Made with a high back for transporting liquid cylinders, and a four-sided forklift access, the STP-16-AL fits Air Liquide style trailers.

STP-16-AL  
 Height: "  
 Width: 40.5"  
 Depth: 40"  
 Weight: 215 lb.  
 Cylinder capacity: 20" (2)

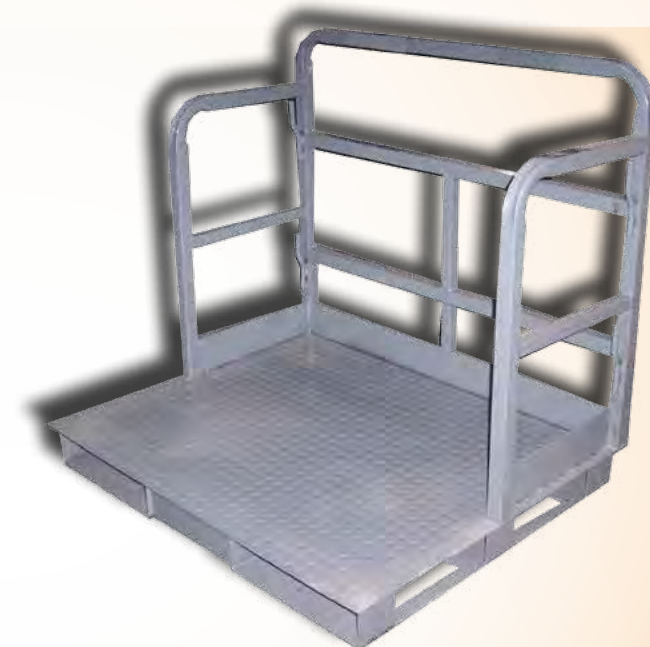

Using a heavy duty steel grated floor the STP-16-MG was designed for MG Industry trailers.

STP-16-MG  
 Height: "  
 Width: 38.5"  
 Depth: 32"  
 Weight: 265 lb.  
 Cylinder capacity: 9.5" (12)

Customizable pallet racks store pallets in a 2x2 configuration to save space.

Pallet Racks  
 Height: 90"  
 Width: 104"  
 Depth: 40"  
 Weight: 730 lb.  
 Rack capacity: (4) or (6)



# Saf-T-Cradles

Saf-T-Cradles make it easy to manage filling multiple cylinders by linking them into a single, easily portable, cylinder bank. Our cradles are designed to hold 6 to 16 9.5" cylinders.

Saf-T-Cradles are available with manifolds, including rigid to flexible, armored pigtails and standard or RPV valves.

Saf-T-Cradles ship fully assembled, stamped with a serial number, and designed with open sight to the cylinder bottoms for the 5 and 10 year inspections.

Select cradles come with PE stamps and load-test certification to meet vigorous off-shore requirements.



H-Tops come equipped with four lifting ears, a lifting eye, and four sided lifting access, for maximum maneuverability.

## Quality Construction

- Durable powder coated paint.
- Galvanization options.
- Drains at the bottom for lasting quality in any weather.
- 7 gauge steel top protects while providing a sturdy lift point.
- Optional 6 in-line caster designs allow for a full 360 degree spin.



# Manifolds

## Six Pack

Flexible: MFL-6-XXX-FX  
Rigid Copper Loop: MFL-6-XXX-RD  
Post Sintered: MFL-6-XXX-UN  
Armored: MFL-6-XXX-Armored



## Twelve Pack

Flexible: MFL-12-XXX-FX  
Rigid Copper Loop: MFL-12-XXX-RD  
Post Sintered: MFL-12-XXX-UN  
Armored: MFL-12-XXX-Armored



## Sixteen Pack

Flexible: MFL-16-XXX-FX  
Rigid Copper Loop: MFL-16-XXX-RD  
Post Sintered: MFL-16-XXX-UN  
Armored: MFL-16-XXX-Armored



## Pigtails

Pigtails are available for the following gases. Simply replace the XXX of your manifold order with the right CGA.

Carbon Dioxide: CGA 320  
Nitrous Oxide: CGA 326  
Air: CGA 346  
Hydrogen: CGA 350  
Propane/Acetylene: CGA 510  
Oxygen: CGA 540  
Inert Gases: CGA 580



Distribution





The PH-16T and 18T Pallet Headers are designed to attach to a standard pallet with a manifold for high volume deliveries. Excellent for fast turn-around jobs.

PH-16T/PH-18T  
 Height: 55"  
 Width: 38"  
 Weight: 105 lb.  
 Cylinder capacity: 9.5" (16/18)

The standard C6-4C holds six cylinders with a lifting eye and forklift access top and bottom.

C6-4C  
 Height: 85"  
 Width: 22"  
 Depth: 32"  
 Weight: 320 lb.  
 Cylinder capacity: 9.5" (6)  
 Weight Capacity: 1950 lb.  
 Wheels: SC-53, SC-54



The C6-FL forgoes the wheels for a stationary cradle moved by forklift, pallet jack, or lifting eye.

C6-FL  
 Height: 81"  
 Width: 22"  
 Depth: 32"  
 Weight: 273 lb.  
 Cylinder capacity: 9.5" (6)  
 Weight Capacity: 1950 lb.



The C6-6CH has inset casters for stability, an H-Top for upper access, and a forklift bottom.

C6-6CH  
 Height: 85"  
 Width: 22"  
 Depth: 32"  
 Weight: 320 lb.  
 Cylinder capacity: 9.5" (6)  
 Weight Capacity: 1950 lb.  
 Wheels: SC-67, SC-68





The C12-4C is a larger cradle for 12 cylinders built with casters, four-point lifting ears, lifting eye, and lots of forklift access.

**C12-4C**  
 Height: 85"  
 Width: 32"  
 Depth: 42"  
 Weight: 432 lb.  
 Cylinder capacity: 9.5" (12)  
 Weight Capacity: 2950 lb.  
 Wheels: SC-23, SC-24

The C12-6CH is our 12 cylinder design with an H-Top, six in-line casters, and forklift access for maximum portability.

**C12-6CH**  
 Height: 85"  
 Width: 32"  
 Depth: 42"  
 Weight: 320 lb.  
 Cylinder capacity: 9.5" (12)  
 Weight Capacity: 2950 lb.  
 Wheels: SC-67, SC-68



The Pallet Pak holds 16 cylinders on a forklift base with a lifting eye. Built to your delivery style pallet bottom with trap.

**Pallet Pak**  
 Height: 85"  
 Width: 43"  
 Depth: 40"  
 Weight: 507 lb.  
 Cylinder capacity: 9.5" (16)  
 Weight Capacity: 4500 lb.



The C12-FL is designed to be liftable by pallet jacks, forklifts, and overhead cranes.

**C12-FL**  
 Height: 81"  
 Width: 32"  
 Depth: 42"  
 Weight: 398 lb.  
 Cylinder capacity: 9.5" (12)  
 Weight Capacity: 2950 lb.

# Pallet Trailers

Simplify your entire gas operation by adding a Saf-T-Cart pallet trailer to your fleet. Pallet trailers allow you to streamline your operation by controlling the movement of cylinders from filling to delivery. Each pallet sits securely on the trailer by nesting onto a picket built into the frame. Furthermore, our hands-on construction means every trailer and truck to leave is quality driven and of the highest caliber.

## Quality Construction

Beginning with the conceptual design then flowing down to the individual welder, human ingenuity and scrutiny drives the building process.

Computer drawn design enables us to begin our quality efforts before construction starts. Then precision driven people finish the work.

Pallet Trailers

8 Pallet Truck Bed with Lift Gate



Drop Deck Trailer



Pallet Trailers



24 Pallet Trailer

### *Operational Efficiency*

Palletized operations immediately boost efficiency by moving and storing cylinders in bulk for a quick turn around. Though a pallet trailer can be docked for a single-cylinder delivery, its ability to load and unload from the sides in undockable situations make it the most versatile way to deliver your cylinders. Many of our pallet trailers are also used as portable storage platforms when not in use.



Mini Tube Trailer



*Designed for You*  
 Every pallet trailer is custom built for each customer based on their unique demands. We don't just make the best pallet trailers on the market; we provide you with the best trailer for your individual operation. Our goal is to provide you with the trailer you need to strip away all limitations from your company and maximize your potential. Whether cylinders or hard goods, these trailers deliver.



4 Pallet Truck Bed with Liftgate

Palletized Orca Tank Trailer



The Safety Snap Cap, designed by the American Cap Company, allows easy access to the valve handle without removing the cap and regulators. Painted a highly visible safety yellow, it also comes with a lock for extra security.

High Pressure Cylinder Caps  
 SC8FNNP-12: 3.125x11 UN fine thread  
 SC8CNNP-12: 3.125x7 UN coarse thread

Low Pressure Cylinder Caps  
 SC2FNNP-12: 3.5x11 UN fine thread  
 SC2CNNP-12: 3.5x8 UN coarse thread




The construction collar provides easy access to the valve and valve handle while protecting those parts from physical damage.



Construction Collar  
 CC2FDS: 3.5"x11 UN  
 CC8LS: 3.125"x11 UN



Saf-T-Cart straps range from the simple STP-15 flat hook, to the STP-55 sewn eyelet. From ratchet strap to alligator clip, each uses high-tensile webbing for the power needed to secure your cylinders safely and tightly.

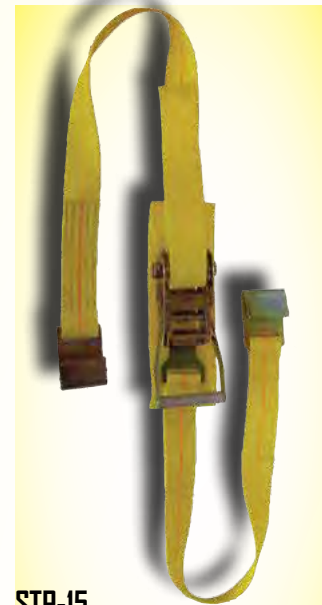

STP-15  
 Fixed Length: 4'  
 Overall Length: 9'  
 Hook: Flat



STP-25  
 Fixed Length: 4'  
 Overall Length: 9'  
 Hook: D Ring



STP-35  
 Fixed Length: 4'  
 Overall Length: 9'  
 Hook: 12" Chain



STP-42  
 Fixed Length: --  
 Overall Length: 42"  
 Hook: Clip

Saf-T-Cart's E-Track Straps use bracketed ends to fit slots on your cart, cage, or pallet. Additionally, a ratchet tightens the strap to fit the load. Since Saf-T-Cart products are lined with slots for these straps, they become infinitely adjustable to your load.



STP-45  
 Fixed Length: --  
 Overall Length: 4'  
 Hook: D Ring



STP-55  
 Fixed Length: 4'  
 Overall Length: 9'  
 Hook: Sewn



5304-SEF/5308-SEF  
 Overall Length: 4' / 8'  
 Hook: E-Hook





**SC-1**  
6" semi-pneumatic wheel with a plastic hub.  
6"x1.75"  
.5" plastic bearing  
Load Capacity: 60 lb.



**SC-2**  
6" semi-pneumatic wheel with a steel hub.  
6"x1.75"  
.5" ball bearing  
Load Capacity: 100 lb.



**SC-2A**  
6" semi-pneumatic wheel with a plastic hub.  
6"x1.75"  
3/8" plastic bearing  
Load Capacity: 50 lb.



**SC-2B**  
6" polyolefin wheel  
6"x1.75"  
.5" plastic bearing  
Load Capacity: 50 lb.



**SC-4**  
8" semi-pneumatic wheel with a plastic hub.  
8"x1.75"  
.5" plastic bearing  
Load Capacity: 60 lb.



**SC-5**  
8" semi-pneumatic wheel with a steel hub.  
8"x1.75"  
.5" ball bearing  
Load Capacity: 125 lb.



**SC-7/7A**  
10" polyolefin wheel.  
10"x2.75"  
SC-7: 5/8" plastic bearing  
SC-7A: .75" plastic bearing  
Load Capacity: 200 lb.



**SC-8**  
10" semi-pneumatic wheel with a steel hub.  
10"x2.75"  
5/8" ball bearing  
Load Capacity: 200 lb.



**SC-9/SC-9A**  
10" pneumatic wheel with a steel hub and no flat sealant.  
10"x4"  
SC-9: .75" ball bearing  
SC-9A: 5/8" ball bearing  
Load Capacity: 400 lbs



**SC-10**  
14" semi-pneumatic wheel with a steel hub.  
14"x1.75"  
.75" ball bearing  
Load Capacity: 200 lb.



**SC-11**  
16" pneumatic wheel with a steel hub and no flat sealant.  
16"x4"  
.75" ball bearing  
Load Capacity: 390 lb.



**SC-12**  
5.3"x12" auto tire with a steel hub.  
4 lug rim  
Load Capacity: 840 lb.



**SC-13**  
20" steel wheel with six steel spokes.  
20"x2.5"  
.75" plain bearing  
Load Capacity: 200 lb.



**SC-15**  
24" steel wheel with six steel spokes.  
24"x2.5"  
.75" plain bearing  
Load Capacity: 200 lb.



**SC-16/SC-18**  
8" polyolefin wheel.  
8"x2"  
SC-16: .5" plastic bearing  
SC-18: .75" plastic bearing  
Load Capacity: 350 lb.



**SC-17**  
8" santoprene on polypropylene wheel.  
8"x2"  
5/8" plain bearing  
Load Capacity: 500 lb.



**SC-19**  
10" phenolic wheel.  
10"x2.5"  
.75" roller bearing  
Load Capacity: 290 lb.



**SC-21**  
10" santoprene on polypropylene wheel.  
10"x2.25"  
.75" plain bearing  
Load Capacity: 750 lb.



**SC-33**  
10" aluminum wheel with soft rubber tread.  
10"x2.5"  
.75" roller bearing  
Load Capacity: 800 lb.



**SC-34**  
12" bolt together, 4-ply pneumatic wheel.  
12"x4"  
.75" ball bearing  
Load Capacity: 445 lb.



**SC-67**  
5" phenolic wheel.  
5"x2"  
.5" roller bearing  
Load Capacity: 1200 lb.



**SC-68**  
6" phenolic wheel.  
6"x2"  
.5" roller bearing  
Load Capacity: 1200 lb.



**101222**  
12" pneumatic wheel with a steel hub and no flat sealant.  
12"x3.5"  
.75" ball bearing  
Load Capacity: 400 lb.



**101611**  
16" semi-pneumatic wheel with a steel hub.  
16"x1.75"  
.75" ball bearing  
Load Capacity: 280 lb.



**SC-20**  
3" swivel polyolefin caster  
3"x.75"  
plain bearing  
Load Capacity: 200 lb.



**SC-22A**  
4" swivel polyolefin caster  
4"x1"  
plain bearing  
Load Capacity: 255 lb.



**SC-23**  
4" swivel soft rubber caster with brake.  
4"x2"  
roller bearing  
Load Capacity: 600 lb.



**SC-24**  
4" rigid soft rubber caster.  
4"x2"  
roller bearing  
Load Capacity: 600 lb.



**SC-25**  
6" swivel polyolefin caster with brake.  
6"x2"  
roller bearing  
Load Capacity: 700 lb.



**SC-26**  
6" rigid polyolefin caster.  
6"x2"  
roller bearing  
Load Capacity: 700 lb.



**SC-27**  
3" swivel polyolefin caster with total lock brake.  
3"x1.25"  
ball bearing  
Load Capacity: 500 lb.



**SC-31**  
6" swivel caster.  
6"x2"  
roller bearing  
Load Capacity: 500 lb.





**SC-32**  
6" rigid caster.  
6"x2"  
roller bearing  
Load Capacity: 500 lb.



**SC-36**  
10" swivel caster.  
10"x2"  
roller bearing  
Load Capacity: 600 lb.



**SC-53**  
6" swivel caster.  
6"x2"  
roller bearing  
Load Capacity: 800 lb.



**SC-54**  
6" rigid caster with brake.  
6"x2"  
roller bearing  
Load Capacity: 800 lb.



**SC-65**  
5" rigid phenolic caster.  
5"x2"  
roller bearing  
Load Capacity: 1200 lb.



**SC-66**  
5" rigid phenolic caster with  
brake.  
5"x2"  
roller bearing  
Load Capacity: 1200 lb.



**100351**  
3" swivel caster.  
3"x.75"  
ball bearing  
Load Capacity: 270 lb.



**109844**  
6" swivel caster.  
6"x2"  
ball bearing  
Load Capacity: 500 lb.

# The Origins of SafTCart™

Walker Welders, a welding distributor, started in 1969 on Hwy 322 at the old Delta Welding location in Clarksdale, Mississippi. (Ironically, across the street from the future SafTCart.) During the late 80's SafTCart began as an out-growth of Walker Welders.



Jimmy Walker, Sr., attended shows throughout the country and discovered a need for a new cart manufacturer.

Around the same time Mr. Walker had an idea for a self-contained oxy/acetylene outfit (cutting torch outfit.) The gauges and apparatus are the most expensive parts of the outfit and susceptible to theft... so, this new idea would give the user the ability to lock parts into the cabinet. Then, adding a lifting eye would allow the user to lift the entire unit. He also wanted something recession proof and non-dependent on the Delta since industries were hit hard whenever there was a downturn in the economy.

No one would or wanted to build the cart, so Mr. Walker built it himself. He started by buying equipment at auctions and even purchasing the first Standard Industrial shear and brake press from the Clarksdale Company.

The first factory was in the back of Walker Welders; a small area was cordoned off for cutting, bending, welding, and painting the first carts.



Next came the old Dublin School in Dublin, Mississippi, which Mr. Walker purchased in the early 90's. Walls were removed, a conveyor system installed, and the first official Saf-T-Cart factory began.



Then, in 1997 the facility on Hwy 322, in Clarksdale, Mississippi, was purchased and the operation moved there.



It was thought that SafTCart would never use the entire facility and half would be rented.

However, business grew and so did the plant. Not only did he fill up the space but he built five additions to the plant.

Unfortunately, the flow of parts from fabrication to shipping was less than perfect and alternative locations were sought.

In 2005, the Board of Supervisors and Industrial Foundation brokered a deal for SafTCart to acquire the old Delta Homes location in Clarksdale. This location would give us the space so desperately needed and there was room for expansion. In late 2005, Saf-T-Cart started moving equipment at night and on weekends. Small crews were sent for wiring and cleaning.

There were also repairs to the physical structure of the building and the complete refurbishing of the office area.

As we progressed, we moved a crew of welding stations to the new plant where we started making steel pallets. During the day, we used a bob truck for transporting the new pallets to the old plant to be painted. This kept us filling orders to the customer during the move with little or no down time.

The last step was moving the oven, which proved to be the most interesting.

We used a moving company from Memphis to come in, take out the north wall of the old facility, place the oven on wheels, and then take it to the new location.

After seven years we have filled the new facility up and are storing things vertically. We make carts, pallets, cages, racks, truck beds, trailers, and now Rol Hoppers. Rol Hopper is the latest venture for SafTCart. It is also the first time our target market has shifted from the welding industry to the agricultural industry.





**Innovation**



**Performance**

**Service**

**Quality**

***Make It Better!***

**P.O. Drawer 1869**

**Clarksdale, MS**

**38614**

**1-800-542-2278**

**[www.saftcart.com](http://www.saftcart.com)**